



Maintaining the highest quality on-premises laundry standards should not risk profitability. Wascomat Commercial laundry equipment is designed to increase productivity, lower expenses, and achieve optimal results every time. **Wascomat makes it easy and affordable to upgrade your laundry!**



Industry standard for on-premises laundries

First introduced to North America more than 60 years ago, Wascomat Commercial laundry equipment is known as the original workhorse in OPL applications. Wascomat products are built to the highest standards by combining professional grade construction with cutting edge technology.

- **Save up to 50% on water, energy, and detergent — automatically**
- **Achieve superior wash results**
- **Conserve precious natural resources and run a “green” eco-friendly laundry**
- **Eliminate user error and make custom programs with Compass Pro**
- **Access detailed reports including user statistics, diagnostics, and more**
- **Heavy-duty construction, built to take the abuse of a laundry environment**
- **Products backed by exceptional customer support**

Wascomat Commercial OPL Washers



Wascomat Commercial OPL washers can lower your energy, detergent, and water consumption by up to 50% — automatically. **Wascomat washers, now with Automatic Savings (AS) and Smart Dosing (SD) technology, deliver the most energy efficient and cost-effective laundry solutions on the market.**

Automatic Savings (AS) determines the exact weight of the load and adds precisely the correct amount of water for best results. Other brands of washing machines just fill the water to the same level, no matter how much laundry is in the machine. It is estimated that up to 70% of laundry is under-loaded — that wastes a tremendous amount of water, energy, and money. With AS you'll see water savings up to 50%, as well as energy savings because there's less water to heat.

When you combine AS with **Smart Dosing (SD)** — you save even more. AS works seamlessly and automatically with Wascomat's Smart Dosing (SD) technology to calculate the appropriate amount of detergent/chemicals needed for best wash results. You'll save money on chemicals and also benefit from longer linen life and softer, cleaner linens and towels.

Wascomat Commercial OPL Dryers




Wascomat Commercial OPL single pocket and stack dryers **dry faster using 25% less gas** thanks to ultra-tight construction and the axial airflow system. The unique airflow results in extremely low energy usage, delivering increased efficiency, reduced labor costs, and faster throughput.



Finish maintenance faster with the industry's best lint drawer

- Best ergonomic construction
- Easy to clean lint screen – one swipe and you're done
- Built tough to handle the harsh commercial laundry environment

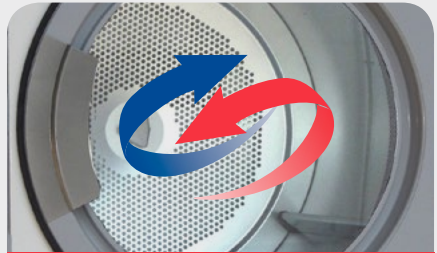


Time and energy savings with Reversing Drum (optional upgrade)

- Prevents tangling and wrinkling
- Dries faster, saving energy
- Customers can complete their laundry faster, freeing up machines

Let us show you how to cut costs, conserve precious natural resources, and improve your laundry results. Request your FREE Laundry Room Analysis today!

Save thousands of gallons of water every year with Wascomat!

Wascomat Commercial washers use **97% less dead water** than competitors' models because of its unique drain valve assembly. You can potentially save thousands of gallons of water annually, drastically reducing your water and energy costs, while at the same time making a positive impact on the environment.



Scan the code to watch a video comparing the water usage and dead water from competitors' washers to the superior drain valve design of Wascomat washers.



Let Wascomat custom tailor a laundry solution for you!



HOTELS & MOTELS



HOSPITALS & HEALTHCARE




FIRE STATIONS



SALONS & SPAS



RESTAURANTS/FOOD SERVICE

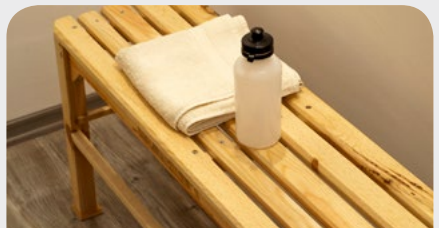

ATHLETIC FACILITIES

Plus many more!



Direct Machinery Sales & Service

50 Commerce Place, Hicksville, NY 11801

www.DirectMachinery.com • info@DirectMachinery.com

516-938-4300



Washer Ultra Dry

WASCOMAT WUD SERIES

Combining world-class reliability with innovative features and programmability, **Wascomat washers are designed to work as a system with Wascomat dryers.** The washer initiates the drying process which means, the higher the G-force, the more water is extracted from the laundry. This speeds up the drying process, saving energy, time, and money.



Wash and dry in less than an hour with Wascomat WUD Washers. You will also save energy and up to 50% on water – automatically.

- Save up to 50% on water with Automatic Savings (AS)
- Compass Pro lets you control important functions such as exact water levels, wash times and number of rinses – with a simple turn of the dial
- Robust door handle – durable in any environment
- Door unlocks immediately at the end of final cycle – no delays
- Unique 4-compartment supply dispenser
- Extended machine life with Super Balance
- Provisions to connect up to 5 liquid supplies
- Smart Dosing technology automatically adjusts the ratio of laundry chemicals to water resulting in lower costs, a superior wash, and longer linen life
- Voice guidance feature (optional)
- Interchangeable parts from one machine size to another

Features and Benefits

Wascomat Compass Pro provides the ultimate in flexibility:

- Up to 50 programs, 15 custom
- Customize wash programs to lower costs and increase productivity
- Display wash program information in multiple languages
- Reduce operator error by displaying only the programs you use
- Built-in diagnostics and detailed statistics
- Smart Start – real-time clock for delayed start

Combine Automatic Savings and Smart Dosing for Best Results and Greater Savings

An estimated 60-70% of washers are underloaded, wasting water, chemicals, and energy. That's why Wascomat developed Automatic Savings (AS), a unique feature that automatically matches water consumption to load size. Combine that with Smart Dosing which adjusts laundry chemicals to water ratio, and you will see immediate savings and superior wash results – every time, automatically.

High Speed Extraction

The perfect balance of speed, performance, and BIC savings. High-speed spin removes more water for faster drying times and better wash performance.

Soft Mount Technology for Easy Installation and Faster Drying

Soft-mount technology allows WUD Series washers to be installed on wood floors, upper floors, and over basements.



Wascomat "WUD" Series Washers	WUD718		WUD725		WUD730		WUD745		WUD760		WUD775	
Capacity (lb/kg)	18	8	25	11	30	14	45	20	60	27	75	33
Width (in/mm)	28 3/8	720	32 11/16	830	35 13/16	910	38 3/16	970	40 3/16	1020	40 3/16	1020
Depth (overall) (in/mm)	28 3/8	721	29 13/16	757	32 5/16	821	37 1/4	947	39	990	44 3/4	1134
Height (in/mm)	44 9/16	1132	47 11/16	1212	52 3/4	1340	56	1426	57 1/2	1462	57 1/2	1462
Height to bottom of door (in/mm)	14	355	14 3/8	365	17 1/8	435	18 1/2	470	19 11/16	500	19 11/16	500
Door opening diameter (in/mm)	12 3/16	310	14 3/8	365	15 9/16	395	17 1/8	435	17 1/8	435	17 1/8	435
Cylinder volume (ft ³ /l)	3.6	75	3.7	105	4.6	130	6.4	180	8.5	240	10.6	300
Drain outlet diameter (in/mm)	2 15/16	75	2 15/16	75	2 15/16	75	2 15/16	75	2 15/16	75	2 15/16	75
Height to centerline of drain (in/mm)	4 1/16	103	4 1/16	103	4 1/16	103	3 15/16	100	3 15/16	100	3 15/16	100
Extract (rpm/C-Force)	1098 / 350		1025 / 350		980 / 350		930 / 350		890 / 350		820 / 300	
Dynamic floor load (lb/kN)	417 +/- 110	1.9 +/- 0.5	560 +/- 112	2.5 +/- 0.5	703 +/- 114	3.1 +/- 0.5	944 +/- 221	4.2 +/- 1	1158 +/- 221	5.2 +/- 1	1387 +/- 277	5.2 +/- 1.2
Dynamic frequency (Hz)	18.3		17.1		16.3		15.5		14.8		13.7	
Noise level (dBA) in extraction	<75		<78		<79		<85		<85		<84	
Crated width - (in/mm)	29 15/16	760	33 7/8	860	37 13/16	960	40 3/16	1020	41 5/16	1050	41 5/16	1050
Crated depth - (in/mm)	32 1/2	825	34 1/4	870	37 13/16	960	41 5/16	1050	42 15/16	1090	47 1/4	1200
Crated height - (in/mm)	50	1270	53 1/8	1350	58 11/16	1490	61 13/16	1570	63	1600	63	1600
Crated weight (lb/kg)	373	170	474	216	611	278	816	371	974	443	1274	580
Electrical Requirements (standard)												
Voltage/frequency/phase	208-240/60/1		208-240/60/1		208-240/60/1		208-240/60/1		208-240/60/1		208-240/60/1	
Power (kW) / Full-load current (A) / Ckt breaker (A)	0.7 / 3.4 / 15		1.1 / 5.3 / 15		1.5 / 7.2 / 15		2.5 / 12.0 / 15		2.7 / 13.0 / 20		3.0 / 14.4 / 20	
Voltage/frequency/phase	120/60/1		120/60/1		120/60/1							
Power (kW) / Full-load current (A) / Ckt breaker (A)	0.8 / 6.7 / 15		1.2 / 10 / 15		1.7 / 14.2 / 20				n/a			
Water Information												
Inlet fittings (* = 3 inlets)	3/4	DN20	3/4	DN20	3/4	DN20	3/4*	DN20*	3/4*	DN20*	3/4*	DN20*
Flow (gpm/lpm @ 45 psi) (each inlet)	5	20	5	20	5	20	5	20	16	60	16	60
Recommended water pressure (psi/kPa)	30-90	200-600	30-90	200-600	30-90	200-600	30-90	200-600	30-90	200-600	30-90	200-600
Approx Water usage (gal / liters @ full load)	9.6	36	10.7	41	16.8	64	20.3	77	30.2	115	38.4	145
Modified Energy Factor	2.7		2.7		2.6		2.4		2.4		2.4	
Water Factor (Gal per cycle/drum volume)	3.9		3.4		4.0		3.9		3.9		3.9	

Refer installation and servicing to qualified, licensed personnel. Always read installation and operating manuals and consult local codes before installation. Protect machines with properly rated, common-trip, circuit breakers ONLY. Warranty void if not properly installed. Solid-mount machines require a concrete foundation, and are not suitable for upper-floor or above-basement installations. Contact Laundrylux for more information and for availability of machines for electric services not listed. Specifications subject to change without notice. Laundrylux assumes no responsibility for errors or omissions in this information.



Cost Savings in Water & Energy with Automatic Savings (AS)

- Determines load weight and adds precisely the correct amount of water
- Up to 50% water savings — automatically
- Less water to heat
- Reduces water and energy consumption



Efficiency & Economy Savings with Smart Dosing

- Up to 50% water savings — automatically
- Determines load weight and adds precisely the correct amount of water and detergent
- Tangible results in efficiency, costs, and cleaning results
- Reduces chemical usage





Wascomat "WUD" Series Washers	WUD7100		WUD7145		WUD7200		WUD7265	
Capacity (lb/kg)	100	45	145	65	200	90	265	120
Width (in/mm) *with optional soap injector	64*	1625*	66 1/2*	1690*	79 1/2	2020*	87 13/16*	2230*
Depth (overall) (in/mm) *with optional soap injector	66 7/8*	1750*	74 1/4*	1885*	76 1/8	1935*	84 5/8*	2150*
Height (in/mm)	79 5/16	2015	79 5/16	2015	97 10/16	2480	87 13/16	2230
Height to bottom of door (in/mm)	35 13/16	910	35 13/16	910	39 3/16	995	39 3/16	995
Door opening diameter (in/mm)	21 1/16	535	21 1/16	535	27 9/16	700	27 9/16	700
Cylinder volume (ft ³ /l)	14.1	400	21.2	600	30	850	38.8	1100
Drain outlet diameter (in/mm)	4 15/16	110	4 5/16	110	4 5/16	110	4 5/16	110
Height to centerline of drain (in/mm)	n/a							
Extract (rpm/G-Force)	825/350		800/350		720/350		663/300	
Dynamic floor load (lb/kN)	3552 +/- 270	15.8 +/- 1.2	3574 +/-1439	15.9 +/-6.4	4946 +/-1641	22 +/- 7.3	5395 +/- 1641	24 +/- 7.3
Dynamic frequency (Hz)	13.8		12.7		12.0		11.1	
Noise level (dBA) in extraction	n/a							
Crated width - (in/mm)								
Crated depth - (in/mm)								
Crated height - (in/mm)								
Crated weight (lb/kg)	2860	1300	3300	1500	5104	2320	5324	2420
Electrical Requirements (standard)								
Voltage/frequency/phase	n/a							
Power (kW) / Full-load current (A) / Ckt breaker (A)	n/a							
Voltage/frequency/phase	440 or 480/60/3 (15)							
Power (kW) / Full-load current (A) / Ckt breaker (A)	440 or 480/60/3 (15)							
Water Information								
Inlet fittings (* = 3 inlets)	1 1/4	DN32	1 1/4	DN32	1 1/2	DN40	1 1/2	DN40
Flow (gpm/lpm @ 45 psi) (each inlet)	40	150	40	150	53	200	53	200
Recommended water pressure (psi/kPa)	30-90	200-600	30-90	200-600	30 - 90	200-600	30-90	200-600
Approx Water usage (gal / liters @ full load)	n/a							
Modified Energy Factor	n/a							
Water Factor (Gal per cycle/drum volume)	n/a							

Refer installation and servicing to qualified, licensed personnel. Always read installation and operating manuals and consult local codes before installation. Protect machines with properly rated, common-trip, circuit breakers ONLY. Warranty void if not properly installed. Solid-mount machines require a concrete foundation, and are not suitable for upper-floor or above-basement installations. Contact Laundrylux for more information and for availability of machines for electric services not listed. Specifications subject to change without notice. Laundrylux assumes no responsibility for errors or omissions in this information.



Greatest Flexibility with Compass Pro

- Up to 50 programs, 15 custom
- Automatic Savings (AS)
- One control knob for easy program selection
- Display two languages at the same time
- SmartStart – real-time clock for delayed start
- Detailed user statistics & programmability
- Reduce operator error by displaying only the programs you use
- Available on 18-75lb models



Ultimate Customization with Clarus Control

- Fully programmable menu-driven microprocessor control
- Combines timing, optimal water levels, and temperature* to ensure superior results
- Create and store up to 192 custom programs, 9 standard
- Smart card interface allows off-site programming by chemical company professionals
- Available on 100-265lb models

*Temperature maintained on self heated machines only.





Wascomat Commercial Soft Mount On-Premises Washers are available in 18, 25, 30, 45, 60, 75, 100, 145, 200, and 265lb capacities to fit your needs.

**Contact us today to learn more about
our new products and technologies.**

Front Panel Options



White
Standard on 18 & 25lb Models



Brushed Stainless Steel
Standard on 30-265lb Models
Optional Upgrade on 18 & 25lb Models

Direct Machinery Sales & Service

50 Commerce Place, Hicksville, NY 11801

www.DirectMachinery.com • info@DirectMachinery.com

516-938-4300



Washer Super Dry

WASCOMAT WSD SERIES

Combining world-class reliability with innovative features and programmability, **Wascomat washers are designed to work as a system with Wascomat dryers.** The washer initiates the drying process which means, the higher the G-force, the more water is extracted from the laundry. This speeds up the drying process, saving energy, time, and money.



Wascomat WSD Washers continue a long tradition of excellence in technology, design, and quality.

- Save up to 50% on water with Automatic Savings (AS) (available on 65 & 80 lb models)
- Compass Pro lets you control important functions such as exact water levels, wash times and number of rinses – with a simple turn of the dial
- Robust door handle – durable in any environment
- Door unlocks immediately at the end of final cycle
- Unique 4-compartment supply dispenser
- Super Balance ensures the correct extraction for maximum savings in drying time, and minimizes stress on the machine for trouble-free operation and longer life
- Provisions to connect up to 5 liquid supplies
- Smart Dosing technology automatically adjusts the ratio of laundry chemicals to water resulting in lower costs, a superior wash, and longer linen life
- Voice guidance feature (optional)
- Interchangeable parts from one machine size to another

Features and Benefits

Wascomat Compass Pro provides the ultimate in flexibility:

- Up to 50 programs, 15 custom
- Customize wash programs to lower costs and increase productivity
- Display wash program information in multiple languages
- Reduce operator error by displaying only the programs you use
- Built-in diagnostics and detailed statistics
- Smart Start – real-time clock for delayed start

Combine Automatic Savings and Smart Dosing for Best Results and Greater Savings

An estimated 60-70% of washers are underloaded, wasting water, chemicals, and energy. That's why Wascomat developed Automatic Savings (AS), a unique feature that automatically matches water consumption to load size. Combine that with Smart Dosing which adjusts laundry chemicals to water ratio, and you will see immediate savings and superior wash results – every time, automatically.

More Choice

With Wascomat Compass Pro you choose the programs that best suit your needs. Modify standard wash programs to find the perfect balance between low water and energy consumption – or create your own programs to meet the specific needs of your facility.

Big Load Performance

Wascomat WSD Series washers are designed to handle large commercial-size loads. Higher G-force means less drying time, so you'll save big on energy costs. On-premises laundries benefit from a faster throughput – resulting in quick turnarounds and increased productivity.

Wascomat "WSD" Series Washers	WSD765		WSD780		WSD7135	
Capacity (lb/kg)	65	30	80	36	135	60
Width (in/mm)	36 3/4	933	43 7/8	1115	46 3/16	1173
Depth (overall) (in/mm)	38 3/4	985	44 1/8	1121	50 5/8	1286
Height (in/mm)	57 5/16	1456	61 13/16	1570	65 7/8	1673
Height to bottom of door (in/mm)	20 1/2	520	21	534	21 1/4	540
Door opening diameter (in/mm)	16 1/8	410	21 1/16	535	21 1/16	535
Cylinder volume (ft ³ /l)	9.9	280	12.4	350	21.2	600
Drain outlet diameter (in/mm)	2 15/16	75	2 15/16	75	2 15/16	75
Height to centerline of drain (in/mm)	4 11/16	119	4 13/16	122	4 1/16	103
Extract (rpm/G-Force)	805 / 300		650 / 220		630 / 220	
Dynamic floor load (lb/kN)	1101 +/- 2135	4.9 +/- 9.5	1551 +/- 2405	6.9 +/- 10.7	2248 +/- 3507	10 +/- 15.6
Dynamic frequency (Hz)	13.4		10.8		10.5	
Noise level (dBA) in extraction	<75		<82		<84	
Crated width - (in/mm)	43 5/16	1100	44 7/8	1140	47 5/8	1210
Crated depth - (in/mm)	45 11/16	1160	54 5/16	1380	55 1/8	1400
Crated height - (in/mm)	62 5/8	1590	67 11/16	1720	72 13/16	1850
Crated weight (lb/kg)	882	401	1272	579	1920	873
Electrical Requirements (standard)						
Voltage/frequency/phase	208-240/60/1 or 3-		208-240/60/1 or 3-		208-240/60/3-	
Power (kW) / Full-load current (A) / Ckt breaker (A)	1.5 / 72 / 15		1.8 / 8.6 / 15		2.6 / 72 / 15	
Voltage/frequency/phase	480 / 60 / 1 or 3-		480/60/1 or 3-		480/60/3-	
Power (kW) / Full-load current (A) / Ckt breaker (A)	1.5 / 3.1 / 10		1.8 / 3.8 / 10		2.6 / 3.1 / 10	
Water Information						
Inlet fittings (* = 3 inlets)	3/4	DN20	3/4	DN20	1	DN25
Flow (gpm/lpm @ 45 psi) (each inlet)	16	60	16	60	25	110
Recommended water pressure (psi/kPa)	30-90	200-600	30-90	200-600	30-90	200-600
Approx Water usage (gal / liters @ full load)	n/a					
Modified Energy Factor						
Water Factor (Gal per cycle/drum volume)						
Refer installation and servicing to qualified, licensed personnel. Always read installation and operating manuals and consult local codes before installation. Protect machines with properly rated, common-trip, circuit breakers ONLY. Warranty void if not properly installed. Solid-mount machines require a concrete foundation, and are not suitable for upper-floor or above-basement installations. Contact Laundrylux for more information and for availability of machines for electric services not listed. Specifications subject to change without notice. Laundrylux assumes no responsibility for errors or omissions in this information.						



***NOTE:** AS available on 65 & 80lb washers. The 135lb washer does NOT have AS.



Contact us today to learn more about our new products and technologies.

Front Panel



Brushed Stainless Steel
Standard

Direct Machinery Sales & Service

50 Commerce Place, Hicksville, NY 11801

www.DirectMachinery.com • info@DirectMachinery.com

516-938-4300



Washer Quick Dry

WASCOMAT WQD SERIES

Combining world-class reliability with innovative features and programmability, **Wascomat washers are designed to work as a system with Wascomat dryers.** The washer initiates the drying process which means, the higher the G-force, the more water is extracted from the laundry. This speeds up the drying process, saving energy, time, and money.



Wascomat WQD Washers continue a long tradition of excellence in technology, design, and quality.

- Compass Pro lets you control important functions such as exact water levels, wash times and number of rinses — with a simple turn of the dial
- Robust door handle — durable in any environment
- Door unlocks immediately at the end of final cycle — no delays
- Unique 4-compartment supply dispenser
- Extended machine life with Super Balance
- Provisions to connect up to 5 liquid supplies
- Interchangeable parts from one machine size to another

Features and Benefits

Wascomat Compass Pro provides the ultimate in flexibility:

- Up to 48 programs, 15 custom
- Customize wash programs to lower costs and increase productivity
- Display wash program information in multiple languages
- Reduce operator error by displaying only the programs you use
- Built-in diagnostics and detailed statistics
- Smart Start — real-time clock for delayed start

More Choice

With Wascomat Compass Pro you choose the programs that best suit your needs. Modify standard wash programs to find the perfect balance between low water and energy consumption — or create your own programs to meet the specific needs of your facility.

Perfect Fit

Most sizes available in 220 or 120 volt, single phase. Now it's easy to replace old, inefficient top-load or front-load washers with new Wascomat equipment.

Wascomat "WQD" Series Washers	WQD720		WQD725		WQD730		WD745		WQD765		WQD785	
Capacity (lb/kg)	20	9	25	11	30	14	45	20	65	29	85	39
Width (in/mm)	26	660	28 3/8	720	28 3/8	720	29 1/2	750	32 11/16	830	35 13/16	910
Depth (overall) (in/mm)	28 9/16	722	27 9/16	697	31 1/8	787	36	914	40 9/16	1029	43 7/8	1114
Height (in/mm)	44 11/16	1133	48 1/16	1217	48 1/16	1216	52 15/16	1345	56 5/16	1426	57 11/16	1465
Height to bottom of door (in/mm)	14 3/16	355	14 9/16	365	14 9/16	365	17 5/16	435	18 1/2	470	19 7/8	500
Door opening diameter (in/mm)	12 3/16	310	14 3/8	365	14 3/8	365	15 9/16	395	17 1/8	435	17 1/8	435
Cylinder volume (ft ³ /l)	3	85	3.7	105	4.6	130	6.4	180	8.8	250	11.7	330
Drain outlet diameter (in/mm)	3	75	3	75	3	75	3	75	3	75	3	75
Height to centerline of drain (in/mm)	4 1/8	105	4 1/8	105	4 1/8	105	4 1/8	105	4 1/8	105	4 1/8	105
Extract (G-Force)	130		130		130		130		130		130	
Dynamic load (lb/kN)	330 +/- 640	1.5+/-2.9	420+/-720	1.9+/-3.2	520+/-900	2.4+/-4.0	650+/-1130	2.9+/-5.0	850+/- 1420	3.8+/-6.3	1020+/- 1650	4.6+/-7.3
Dynamic frequency (Hz)	11.2		10.4		10.4		10.0		9.5		9.0	
Noise level (dBA)	<70		<70		<70		<72		<71		<74	
Crated width (in/mm)	27 3/16	690	29 1/2	750	29 1/2	750	30 11/16	780	33 7/8	860	37	940
Crated depth (in/mm)	32 11/16	830	35 1/16	890	37 3/8	950	39 3/16	995	43 11/16	1110	47 1/16	1195
Crated height (in/mm)	48	1219	53 1/8	1350	53 1/8	1350	56 7/16	1434	61 1/4	1556	62 7/16	1586
Crated weight (lb/kg)	276	126	364	166	432	169	522	238	615	280	717	326
Electrical Requirements (standard)												
Voltage/frequency/phase	208-240/60/1		208-240/60/1		208-240/60/1		208-240/60/1		208-240/60/1		208-240/60/1	
Power (kW) / Ckt breaker (A)	0.4 / 15		0.5 / 15		0.5 / 15		0.7 / 15		1.1 / 15		1.3 / 15	
Voltage/frequency/phase	120/60/1		120/60/1		120/60/1		120/60/1		120/60/1		120/60/1	
Power (kW) / Ckt breaker (A)	0.5 / 15		0.6 / 15		0.6 / 15		0.8 / 15		1.2 / 15		1.4 / 15	
Water Information												
Inlet fittings (* = 3 inlets)	3/4	DN20	3/4	DN20	3/4	DN20	3/4*	DN20*	3/4*	DN20*	3/4*	DN20*
Flow (gpm/lpm @ 45 psi) (each inlet)	5	20	5	20	5	20	5	20	16	60	16	60
Recommended water pressure (psi/kPa)	30-90	200-600	30-90	200-600	30-90	200-600	30-90	200-600	30-90	200-600	30-90	200-600
Approx Water usage (gal / liters @ full load)	12.9	49	16.3	61.7	20.9	79	30.4	115	42.8	162	53.6	203
Modified Energy Factor	n/a											
Water Factor (Gal per cycle/drum volume)	4.3		4.4		4.5		4.8		4.8		4.6	
<p>Refer installation and servicing to qualified, licensed personnel. Always read installation and operating manuals and consult local codes before installation. Protect machines with properly rated, common-trip, circuit breakers ONLY. Warranty void if not properly installed. Solid-mount machines require a concrete foundation, and are not suitable for upper-floor or above-basement installations. Contact Laundrylux for more information and for availability of machines for electric services not listed. Specifications subject to change without notice. Laundrylux assumes no responsibility for errors or omissions in this information.</p> <p>*There are NH and DN (BSP) threaded on the valves of this machine; please refer to Water connection section in installation manual.</p>												

Contact us today to learn more about our new products and technologies.



Direct Machinery Sales & Service
50 Commerce Place, Hicksville, NY 11801
www.DirectMachinery.com • info@DirectMachinery.com
516-938-4300





OPL Dryers

WASCOMAT D SERIES

Precision-engineered for efficiency, ease of use, and superior drying results, **our dryers are designed to work as a system with Wascomat washers.** Whether for a hospital, nursing home, hotel, school, or other facility, Wascomat dryers are your best choice for reliability, durability and efficiency.

Features and Benefits

- Optimal combination of gas consumption (Btu/hr) and airflow (CFM) provides the best-in-the-world drying performance with the fastest drying time and the lowest energy consumption
- Auto Stop ensures the dryer stops running when linens are dry – saves time and energy while preserving linen life
- Extra large doors make loading and unloading easy
- Easy to clean lint screen – best in the industry
- Quiet operation – Wascomat dryers are designed to keep noise level below 70 dB (A)
- Reverse drum operation minimizes tangling and wrinkling, and improves dryer efficiency
- Sturdy drum suspension with double-sealed bearings and belt drive for “workhorse” durability
- Provides unsurpassed control of temperatures, to avoid damage to linens and maximize reliability
- Axial Airflow and tight construction for extremely low energy consumption – dries faster, saving up to 25% in gas

Controls

- **Compass Pro Controller**
 - Customizable program names
 - Large display for easy program selection
 - More than 20 languages available
 - Real-time clock for automatic start and time/date stamp
 - Detailed user statistics and programmability
- **Selecta II (100 & 135lb Dryers)**
 - 4 temperature settings
 - Displays remaining drying time
 - Complete diagnostics & service mode

A Long History of Excellence

Wascomat dryers offer reliability, durability and significant energy savings for on-premises laundry applications.

Faster Drying Using Up to 25% Less Gas

Built to last, Wascomat dryers are precision-engineered for efficiency, ease of use, and superior drying results. Our dryers are 8-12% larger than competitive models. This allows for even faster drying using less energy, as the linens are allowed to expand, providing more surface area to the heated air. You will appreciate the “green” engineering, cost savings, easy operation, and years of low maintenance.

Reversing Drums

Wascomat reversing drums reduce energy consumption, prevent tangling, and laundry dries more quickly.

Residual Moisture Control (Optional)

The Residual Moisture Control (RMC) option is available on Wascomat single pocket dryers. RMC allows for precise control of remaining moisture in the load. This is best for linens that require a small amount of dampness to further process the linens with pressing equipment. By not over-drying, you’ll benefit from longer linen life and significant labor and energy savings.

Options include: Stainless Steel Drum, RMC, Fresh Air Intake, Exhaust on Top. Call for details.

Wascomat "D" Series - Stack & Single Pocket	D735S		D750S		D735		D767		D783		D7100		D7135			
Capacity (lb/kg)	2 x 35	2 x 16	2 x 50	2 x 22.7	35	16	67	31	83	37.5	100	45	135	61		
Width (in/mm)	31 1/8	790	34 3/16	868	28 1/16	713	37 13/16	961	37 13/16	961	50 13/16	1290	50 13/16	1290		
Depth (in/mm) (Steam heat add 6" (150mm) to D7x models)	43 7/8	1115	52 3/5	1336	47 5/8	1210	53 3/4	1365	61 7/16	1560	50 16/16	1295	58 7/16	1485		
Depth with door open (in/mm) (Steam heat add 6" (150mm) to D7x models)	72 7/16	1840	85 15/16	2183	74 1/8	1883	92 1/8	2340	93 5/16	2370	94 1/2	2400	101 15/16	2590		
Height Overall (in/mm)	76 3/8	1940	82 1/8	2086	66 1/2	1688	73 9/16	1869	73 1/8	1857	97	2465	97	2465		
Height without heating unit (in/mm)	n/a										77 3/8	1965	77 3/8	1965		
Door opening diameter (in/mm)	22 13/16	580	27 1/16	687	22 5/6	580	31 7/8	810	31 7/8	810	37 1/16	940	37 1/16	940		
Cylinder volume (ft ³ /l)	2 x 10.6	2 x 300	2 X 15	2 X 42.3	10 3/16	290	19.4	550	23.8	675	31.7	900	42.4	1200		
Crated Weight (lb/kg)	683	311	880	440	453	206	664	302	695	316	1270	576	1349	612		
Utility Connections																
Exhaust duct diameter (in/mm)	8	200	8	200	8	200	8	250	8	250	12	315	12	315		
Exhaust static pressure (inches H2O / mbar) (max at 60Hz)	0.75	1.9	0.75	1.9	0.75	1.9	0.75	1.9	0.75	1.9	0.37	1	0.37	1		
Gas connection (One inlet supplies both pockets on stack dryers)	1/2 MNPT		3/4 MNPT		1/2 MNPT		1/2 MNPT		1/2 MNPT		1 MNPT		1 MNPT			
Steam connection, inlet & condensate	n/a				1 MNPT		1 MNPT		1 MNPT		1 MNPT		1 MNPT			
Energy Data																
Gas (Btu/hr)	2 x 71,650		2 x 94,000		71,700		112,700		143,400		219,000		280,000			
Airflow (ft ³ /min / m ³ /hr) (gas heat)	2 x 353	2 x 600	2 x 500	2 x 850	360	610	553	940	671	1140	1354	2300	1471	2500		
Electric Heating Power (kW) @ 208-240V/3Ø	9 or 13.5 or 18		n/a		13.5 or 18		18 or 24 or 32		32 or 40		48 or 60		60 or 72			
Airflow (ft ³ /min / m ³ /hr) (elec. heat)	2 x 353	2 x 600			324	550	553	940	671	1140	1354	2300	1471	2500		
Steam Consumption (lb/hr / kg/hr) (approximate)	n/a				80	36	118	54	150 / 68	225 / 102		288 / 131				
Airflow (ft ³ /min / m ³ /hr) (steam heat)	n/a		406	690	636	1080	812	1380	1354	2300	1471	2500				
Electrical Requirements																
Current, gas or steam, 120 V/60Hz(full load/circuit breaker)	2 x 9A / 2 x 15A		2 x 14A / 2 x 20A		7.5A (15A)		15.8A (20A)		16A (20A)		n/a					
Current, gas or steam, 208-240 V/60Hz/1Ø(full load/circuit breaker)	2 x 4.5A / 2 x 15A		2 X 7A / 2 X 15A		3.8A (15A)		8.2A (15A)		8.2A (15A)							
Current, gas or steam, 208-240 V/60Hz/3Ø(full load/circuit breaker)	n/a				3.7A (15A)		10A (15A)		10A (15A)						10A (15A)	
Current, electric, 208-240 V/60Hz/3Ø (full load/circuit breaker)	Depends upon Voltage and power selected. Contact Laundrylux Sales Department.															
Alternate Voltages																
Alternate voltages available. Contact Laundrylux Sales Department.																
Supply Pressures																
Natural Gas (inches H2O / mbar)					3.5-12 / 9-30								6-10 / 15 - 25		6-10 / 15 - 25	
Propane (inches H2O / mbar)					10-13 / 25-30								10-13/ 25-30		10-13/ 25-30	
Steam (psi / bar) (max)	n/a								145 / 10				145 / 10		145 / 10	
Refer installation and servicing to qualified, licensed personnel. Always read installation and operating manuals and consult local codes before installation. Protect machines with properly rated, common-trip, circuit breakers ONLY. Warranty void if not properly installed. Solid-mount machines require a concrete foundation, and are not suitable for upper-floor or above-basement installations. Contact Laundrylux for more information and for availability of machines for electric services not listed. Specifications subject to change without notice. Laundrylux assumes no responsibility for errors or omissions in this information.																

**Contact us today to learn more about
our new products and technologies.**

Front Panel Options



White
Standard



Stainless Steel
Available - Call for Details

Direct Machinery Sales & Service

50 Commerce Place, Hicksville, NY 11801

www.DirectMachinery.com • info@DirectMachinery.com

516-938-4300

